


Minimal Thermostatic Valve Item #0142

Features:

- Built-in thermostatic valve with two-way diverter/stop valve
- Brass construction with thermostatic cartridge & ceramic disc cartridge
- Includes rough-in and trim
- Anti-scald protection & temperature regulation for flow rates as low as 2.4 GPM
- 3/4" Female NPT inlets & outlet
- Flow rate: 15 GPM at 60 PSI
- It can be installed to meet ADA compliance

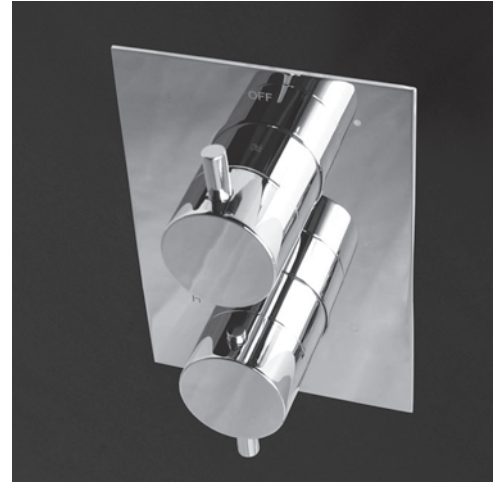

Finish Options:

- CR - Polished Chrome
- NI - Brushed Nickel

Parts:

- 0142-CR-A - Trim only
- 0142-CR-B - Rough-in valve only
- R033 - Replacement ceramic disc cartridge
- R039 - Replacement thermostatic cartridge
- R0142EX - 1" extension kit (specify CR or NI finish)

Product Specifications:



Notes:
 Drawings provided herein are meant to give the user an idea of the product and are not made to scale. The size in inches is rounded up to the nearest 1/16".
 Plumbing specifications are only a guideline and may need to be altered based on the application.
 Product specifications are not binding to the manufacturer and can be changed without notice at any time. Please refer to your shipment for product final sizes.

LACAVA is committed to the highest level of customer service. Please feel free to contact us at 1-888-522-2823 (toll free) or by email at info@lacava.com for technical assistance or any general inquiries.

Rev. 11-26-2014