LACAVA®

Zoom Faucet
Item #EX11

Features:

-Deck-mount single hole faucet
-For cold or premixed water (mixer sold separately)
-Electronic touch-free (infrared sensor) operation promotes germ free environment
-Brass construction
-Includes flexible supply line F 1/2"
-Water flow rate: Max.1 GPM with 10 seconds metering cycle (0.16GPC)
-Upon request supplied with flow regulator to bring down to the CALGreen compliance requirement of 0.5GPM for public places
-Water pressure: 15-90 PSI, recommended 43.5 PSI
-Water temperature: 34-120 degrees Fahrenheit (1-50 degrees Celsius)
-Sensing distance: 6"-10" (15-25 cm)
-It can be installed to meet ADA compliance
-Meets and exceeds the following standards/codes:
-ASME A112.18.1-2012/CSA B125.1-12
-EPA WaterSense High-Efficiency Lavatory Faucet Specification(Version 1.0, October 1, 2007 Edition)
-CMR 248 (Mass. Code of Approval)
-CAL compliant

Water Saving:

On-Demand [10 sec.] faucet (0.16GPC)
Federal Standard (0.25GPC) -36% less
CAL Green (0.20GPC) -20% less

Finish Options:

CR - Polished Chrome

Power Supply:

AC - transformer with a plug to electricity
and/or
DC - battery pack for 4 AA alkaline batteries
(batteries included)
- averagely last for 108,000 use cycles

Recommended Accessories (sold separately):

EX20A - Mechanical mixing valve
or
EX25A - Integrated thermostatic mixing valve

Product Specifications:

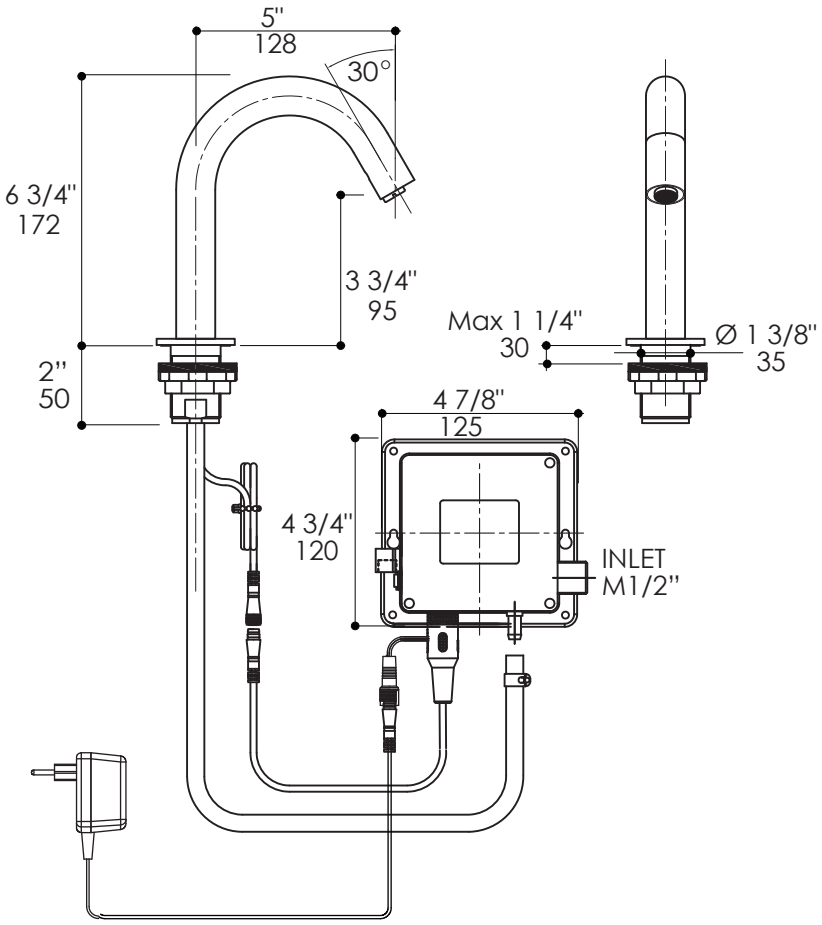

Notes:
Drawings provided herein are meant to give the user an idea of the product and are not made to scale. The size in inches is rounded up to the nearest 1/16".
Plumbing specifications are only a guideline and may need to be altered based on the application.
Product specifications are not binding to the manufacturer and can be changed without notice at any time. Please refer to your shipment for product final sizes.

LACAVA is committed to the highest level of customer service. Please feel free to contact us at 1-888-522-2823 (toll free) or by email at info@lacava.com for technical assistance or any general inquiries.

Rev. 3-5-2018